






Aerpro
First Choice

LED DAYTIME RUNNING LIGHTS

DTRL500S

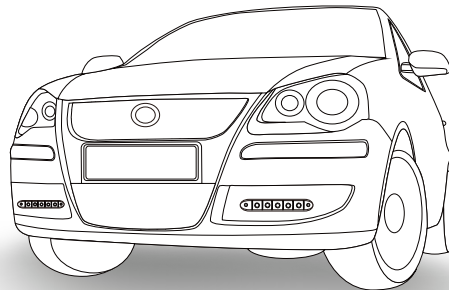


Inclusions

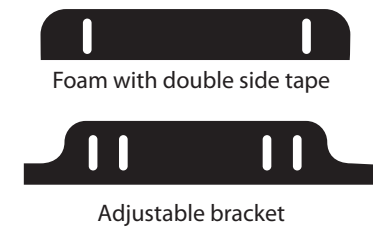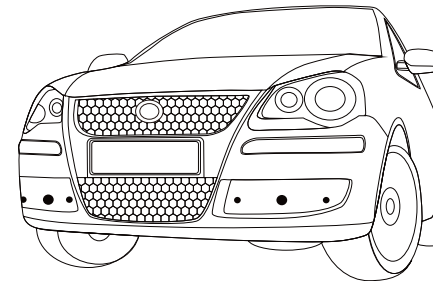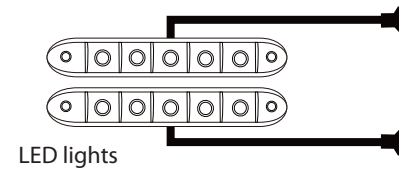


1

Installation

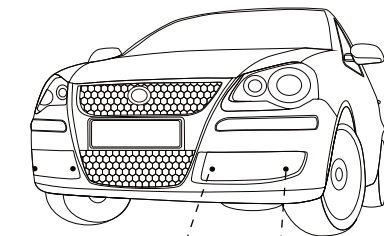


Drill holes
to line up with
bracket

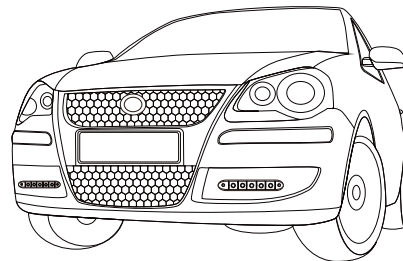

1. Use DTRL mounting bracket as a template for marking holes required for attachment
2. Use foam with double sided tape to hold bracket in position when drilling holes
3. Line up DTRL to pre-drilled holes and secure with screws or bolts provided

2

Wiring Instruction

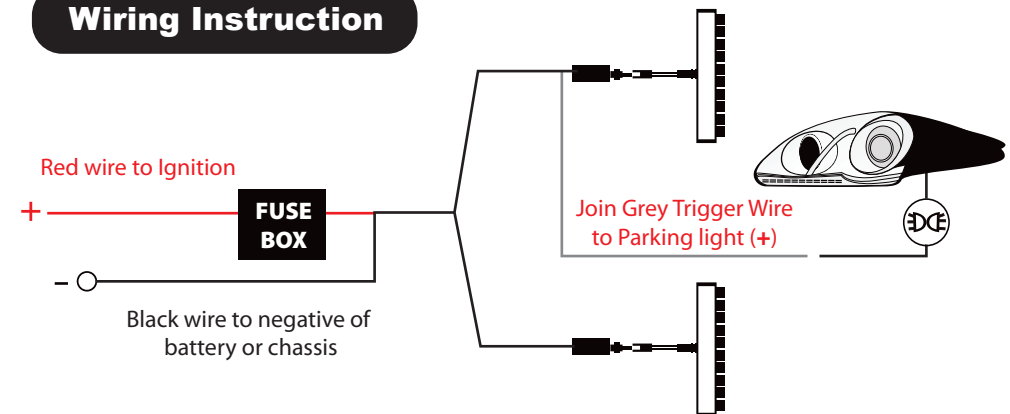

1. To mount daytime running lights, use supplied bracket and mounting hardware.
2. Connect the supplied wiring harness.
3. Red wire to +12V/24 DC ignition or accessory wire
4. Black wire to car ground (chassis) of vehicle
5. Grey wire to +12V/24 DC parking light wire
6. Once connected, turn on to ignition, DTRL's will turn on. Turn on parker lights and DTRL's turn off

Notes: Some vehicles including CANBUS may require an additional relay to be installed between the DTRL and parking light connection. This is to fix flickering problems with the LED's.

3