




NO.	日期	变更内容
△		
△		

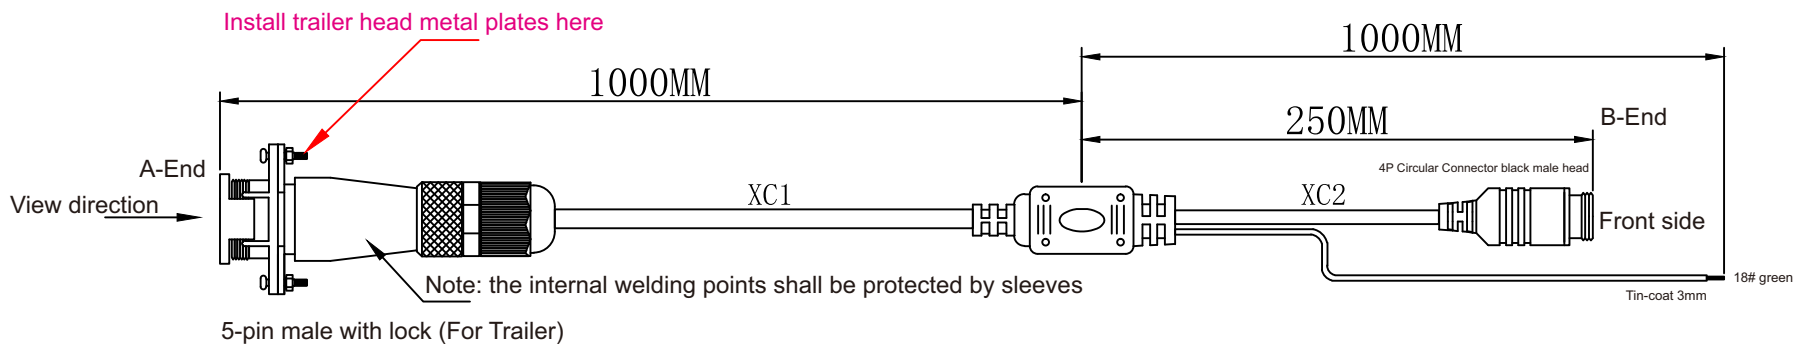

View direction

Wiring Table


A-End	B-End
A1.Red	B1.Red
A2.Yellow&white ground	B2.Ground
A3.White core	B3.White
A4.Yellow core	B4.Yellow core
A5.black	B.18# green



Front side

4P Circular Connector definition

1. red
2. ground
3. white
4. yellow core

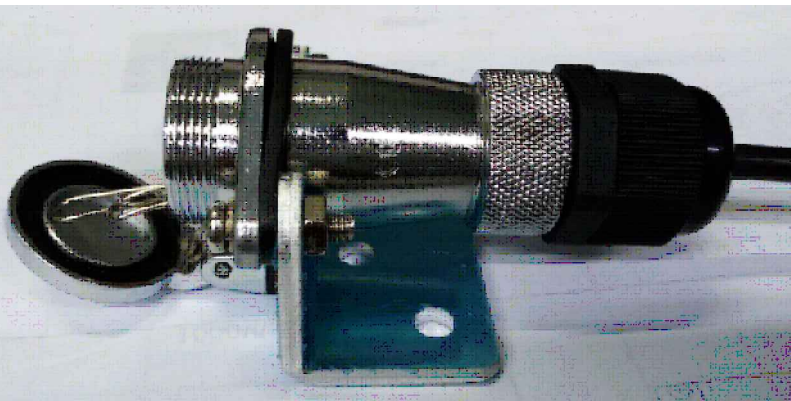

Physical diagram of trailer head aluminum sheet installation

Cable specification:

XC1:2+2+AL OD:5.0 10/0.10B\*0.8+23/0.10BS\*1.4\*2C white&yellow+11/0.14B\*1.1\*2C red&black  
 XC2:1+2+ Polyamide +AL-OD:5.0 10/0.12B\*1.2+30/0.10BS(yellow)+10/0.12B\*1.2\*2C red&white

分段长度	正负差	客户: SDA-104	产品名称: 5针拖车公转1个4P航空公	页次: 1/1	单位: MM	图号: 2016102202
0~80MM	±3MM	机型:	绘制: 黄永林	审核:	版本: A/0	比列: 1:1
80~150MM	±5MM					
150~300MM	±10MM	料号: FCS0026	核准:	客户确认:	深圳市宝安区西乡盛达连接线厂	
300~500MM	±15MM					
500~1000MM	±20MM	日期: 2016.10.22				
1000~3000MM	±30MM					
> 3000MM	±40MM					